


DUYAR



ÇALPARA ÇEK VANA SWING CHECK VALVE

PN 16/10
TSEK
DIN 3202/2-F6
DN 40 ... DN 250

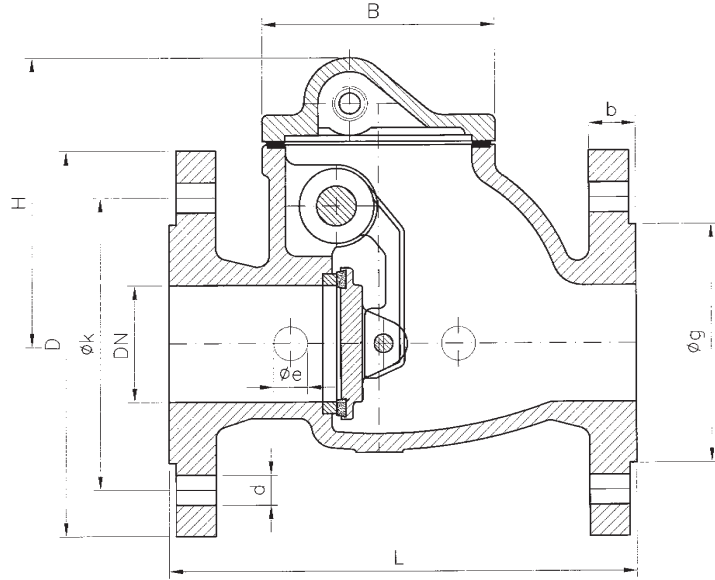

UYGULAMALAR

- Sıcak su ve soğuk su sistemlerinde
- Bütün asitsiz akışkanlar

APPLICATIONS

- Hot and cold water systems
- Fluid excluding acid

MALZEME ÖZELLİKLERİ / MATERIALS		
PARÇA ADI	PART NAME	MALZEME / MATERIAL
GÖVDE	BODY	GG25 / GGG40 / GGG50
KAPAK	BONNET	GG25 / GGG40 / GGG50
MİL	STEM	Ms 58 / SS
KLAPE	DiSC	GG25 / GGG40 / GGG50 KAUÇUK KAPLI / RUBBER COVERED
SİT	SEAT	Ms 58 / SS / BRONZE
CONTA	GASKET	EPDM / KLINGERIT / FRANZELIT

SICAKLIK / BASINÇ TEMPERATURE / PRESSURE		
°C	-10...+120	150
PN	16	13

Anma Çapı Nominal Diameter	DN	40	50	65	80	100	125	150	200	250	
Vana Boyutları Valve Dimensions	L	180	200	240	260	300	350	400	500	600	
TSEK DIN3202/2-F6	H	100	110	130	145	170	195	205	260	340	
By-Pass	B	/ 112	/ 152	/ 158	Ø240	Ø275	Ø336	Ø400			
Flanş Ölçüleri Flange Dimensions TS ISO 7005-2	a	200	300	400	500						
	By-Pass	Ø15								Ø25	
	D	150	165	185	200	220	250	285	340	395	
	k	110	125	145	160	180	210	240	295	350	
	g	88	102	122	138	158	188	212	268	320	
	b	18	20	22	24	26	26	26	28	28	
	d	18				23			23		
Delik Adedi / Hole Qty		4				8			8	12	
Ağırlık / Weight	Kg.	9	11	17.5	21	27	45	61.5	112	148	

10

DCS-16

ÇALPARA ÇEK VANA